



Industrialtooling



Lubrication—Free Tools



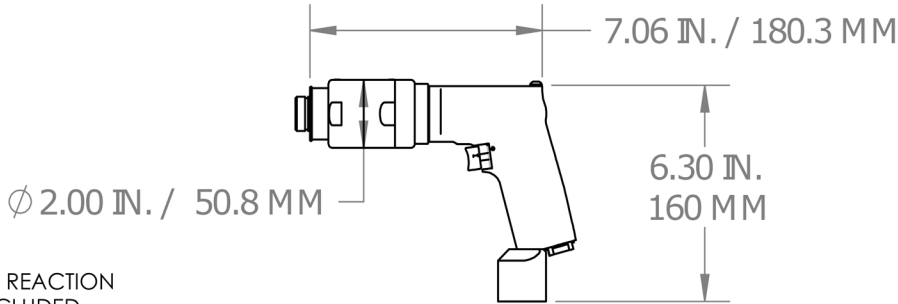
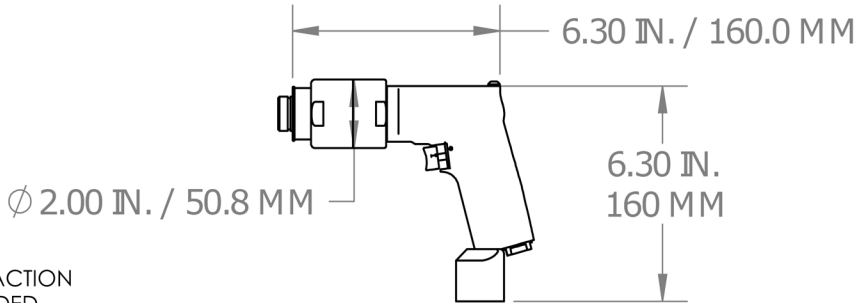
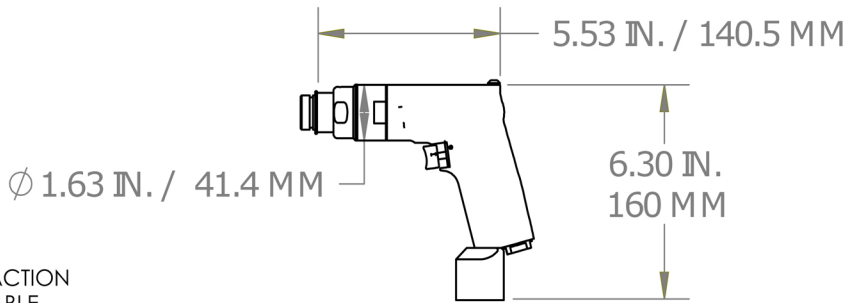
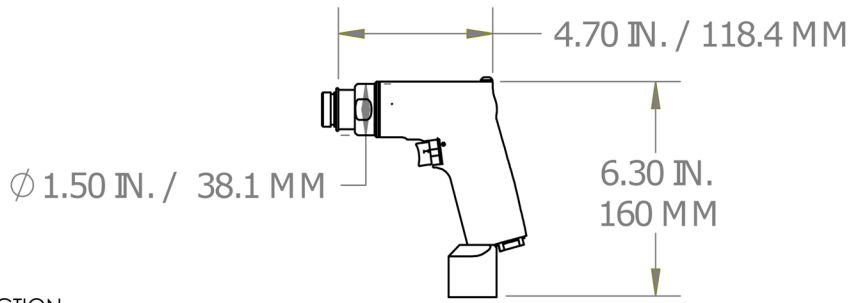
Jiffy Air Tool USA
Phone: 1-800-828-8665 U.S. and Canada
1-775-883-1072 International
2254 Conestoga Drive
Carson City NV 89706-0434

www.jiffyairtool.com

Jiffy Air Tool, Europe
Unit 8 Lane End Industrial Park
High Wycombe, Bucks HP143BY UK
Phone: +49 163 255 48 69
derya@jiffyairtool.com

OIL-FREE

JIFFY MODULAR DRILL (JMD) 1.5 H.P. MOTOR - OFFSET HANDLE

RPM	ORDER NUMBER	WEIGHT
250	23047	3.48 LB / 1.58 KG
 20466 TORQUE REACTION HANDLE INCLUDED		
500	23048	3.12 LB / 1.42 KG
 20466 TORQUE REACTION HANDLE INCLUDED		
2000	23049	2.47 LB / 1.12 KG
 17908 TORQUE REACTION HANDLE AVAILABLE		
3000	23050	2.20 LB / 1.0 KG
6000	23051	2.20 LB / 1.0 KG
 17908 TORQUE REACTION HANDLE AVAILABLE		

CONTACT SALES FOR REVERSE RUNNING VARIANTS

No oil required in air supply - Grease lubrication required for gear train



OIL-FREE

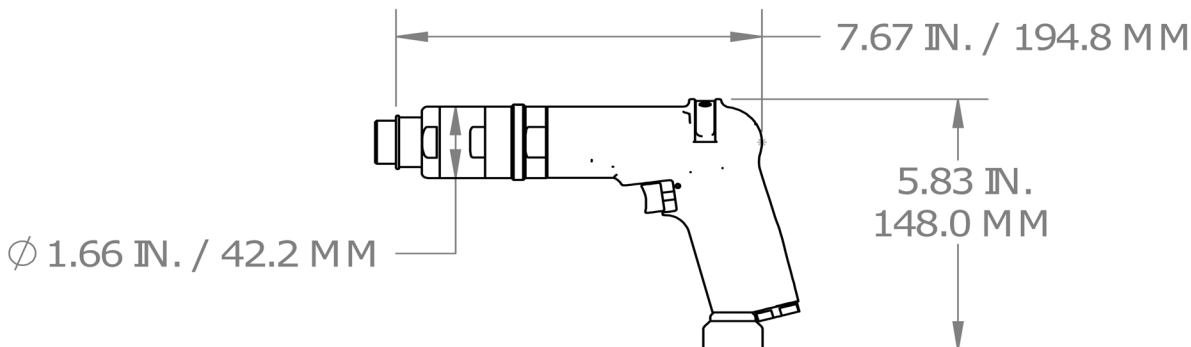
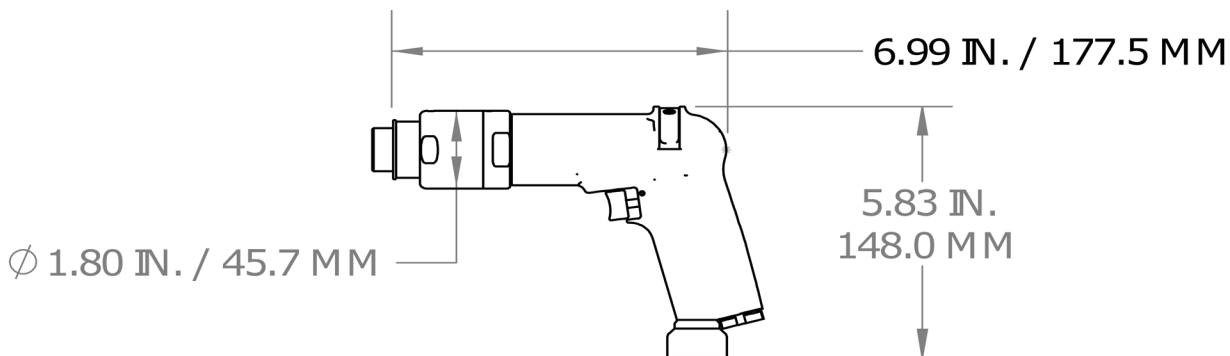
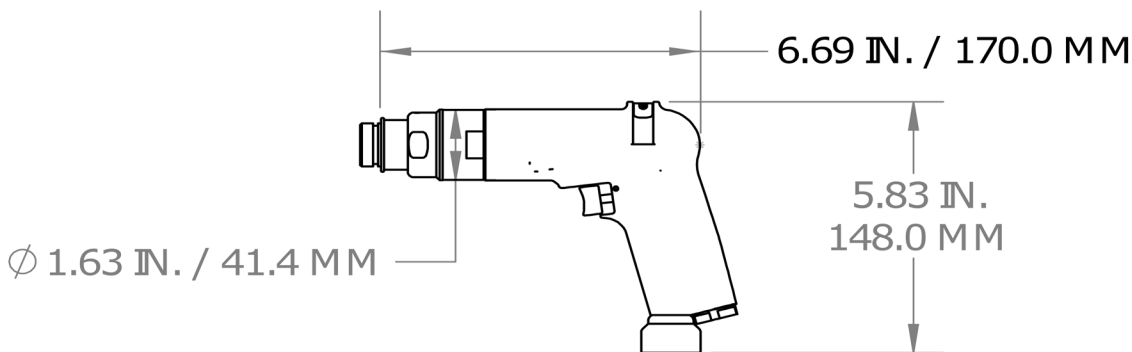
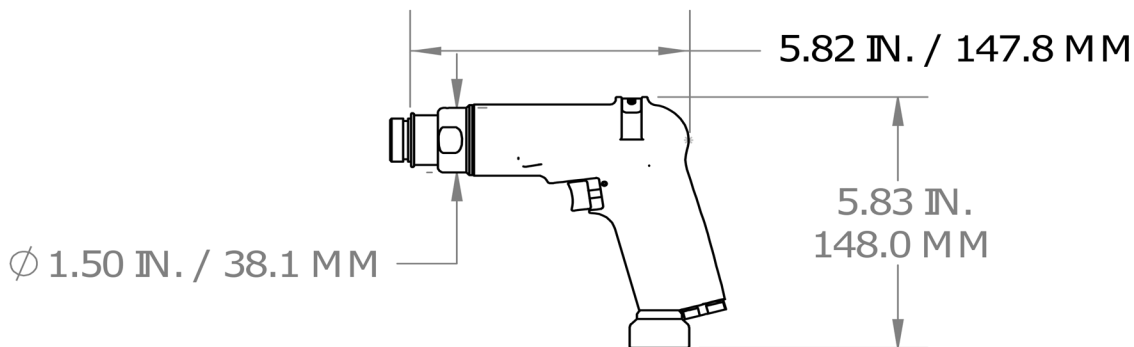
JIFFY MODULAR DRILL (JMD) 1.5 H.P. MOTOR - STRAIGHT HANDLE

RPM	ORDER NUMBER	WEIGHT
250	23040	3.68LB / 1.67 KG
20466 TORQUE REACTION HANDLE INCLUDED 		
500	23041	3.32 LB / 1.50 KG
20466 TORQUE REACTION HANDLE INCLUDED 		
2000	23042	2.63 LB / 1.20 KG
17908 TORQUE REACTION HANDLE AVAILABLE 		
3000	23043	2.2 LB / 1.0 KG
6000	23044	2.2 LB / 1.0 KG
17908 TORQUE REACTION HANDLE AVAILABLE 		

CONTACT SALES FOR REVERSE RUNNING VARIANTS

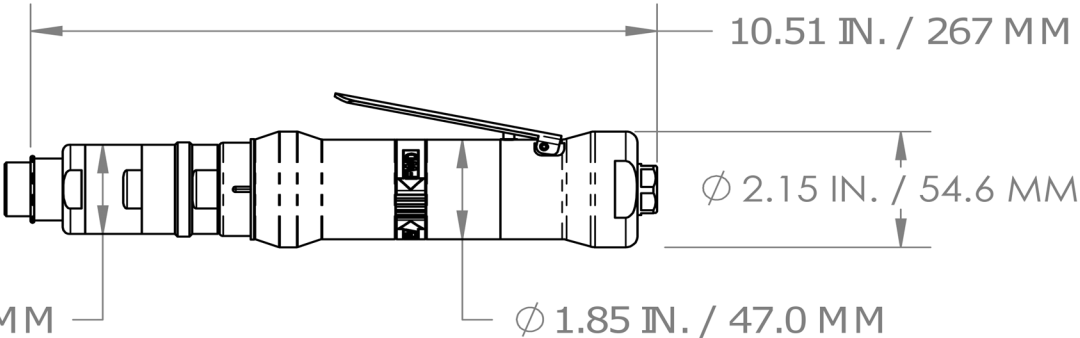
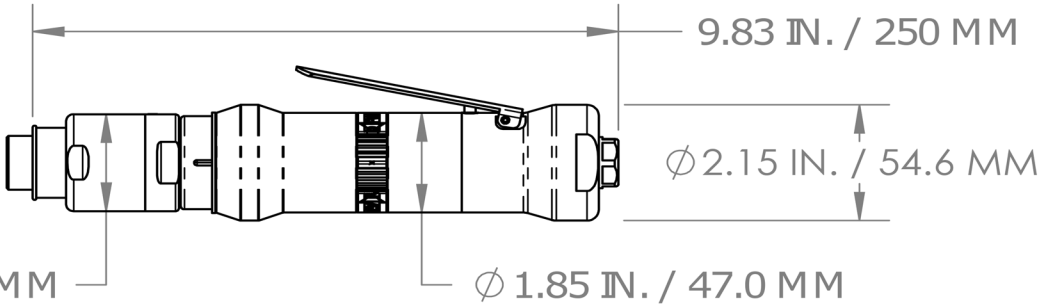
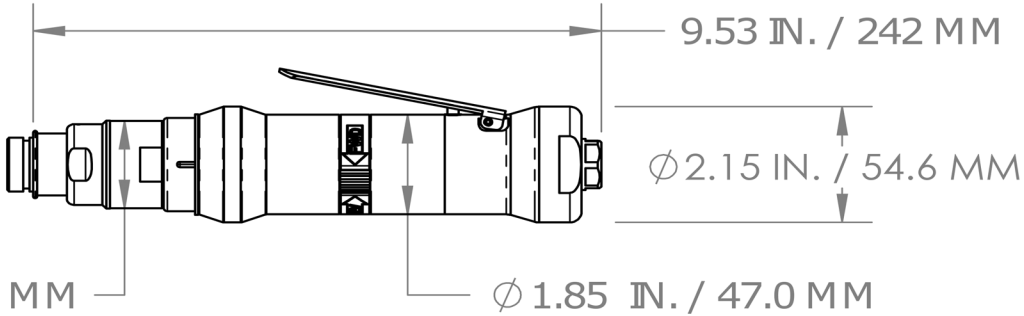
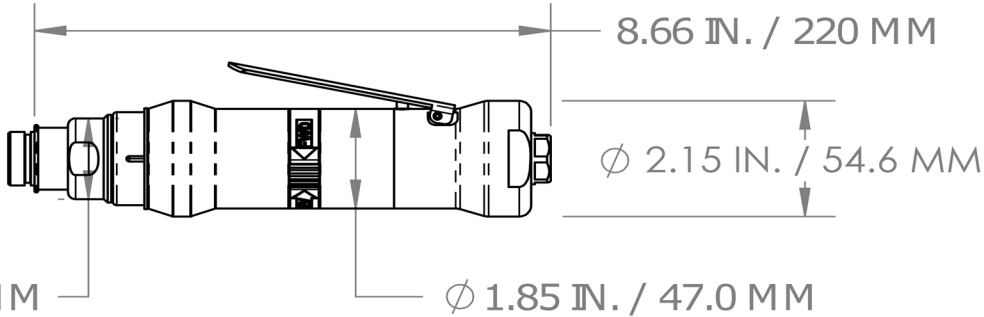
OIL-FREE

JIFFY MODULAR DRILL (JMD) .9 H.P. REVERSIBLE MOTOR - OFFSET HANDLE

RPM	ORDER NUMBER	WEIGHT
250	23320	3.42 LB / 1.55 KG
		
500	23321	3.32 LB / 1.5 KG
		
1000	23322	2.6 LB / 1.2 KG
		
3000	23324	2.3 LB / 1.1 KG
5000	23325	2.3 LB / 1.1 KG
		

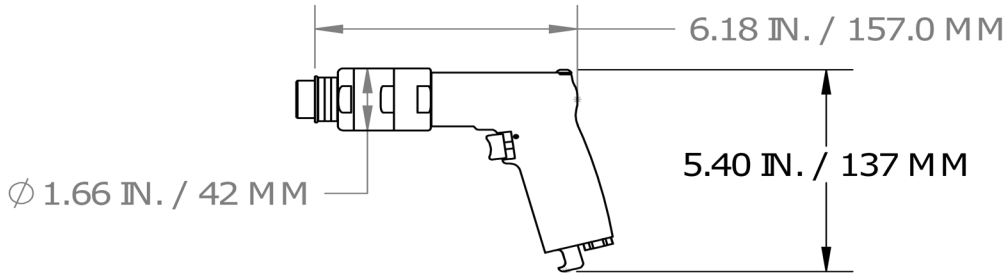
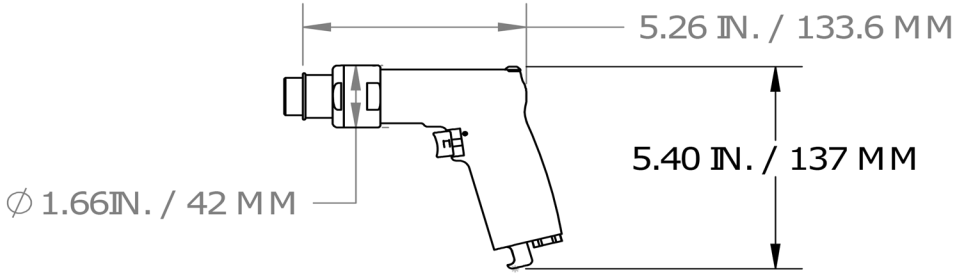
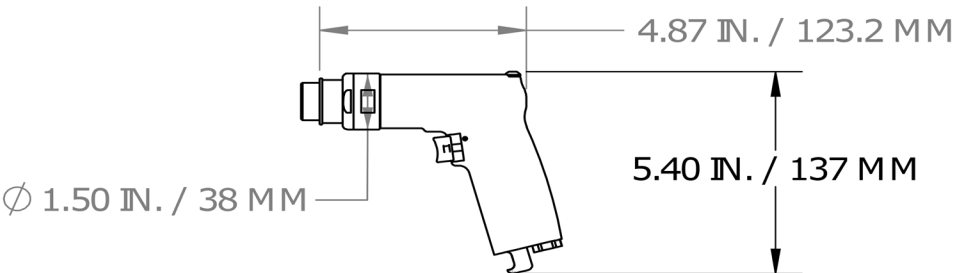
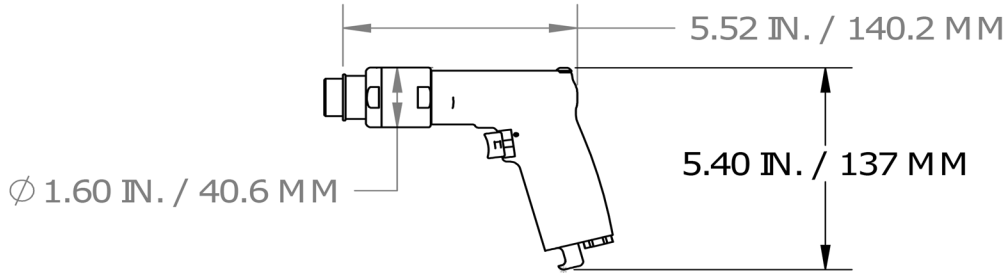
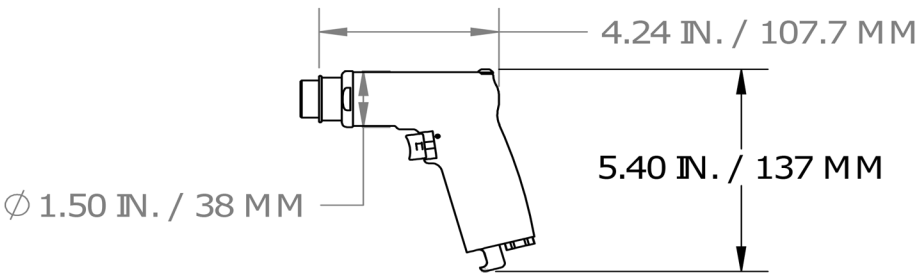
OIL-FREE

JIFFY MODULAR DRILL (JMD) .9 H.P. REVERSIBLE MOTOR - STRAIGHT HANDLE

RPM	ORDER NUMBER	WEIGHT
250	23312	3.45 LB / 1.56 KG
		
500	23313	3.23 LB / 1.46 KG
		
1000	23314	2.8 LB / 1.27 KG
		
3000	23316	2.5 LB / 1.13 KG
5000	23317	2.5 LB / 1.13 KG
		

OIL-FREE

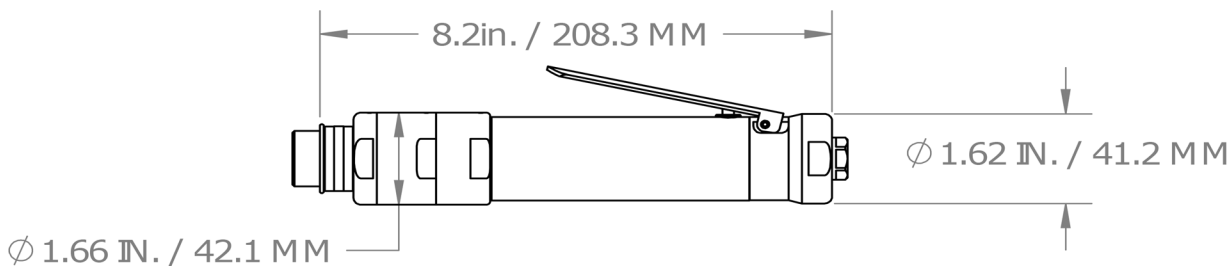
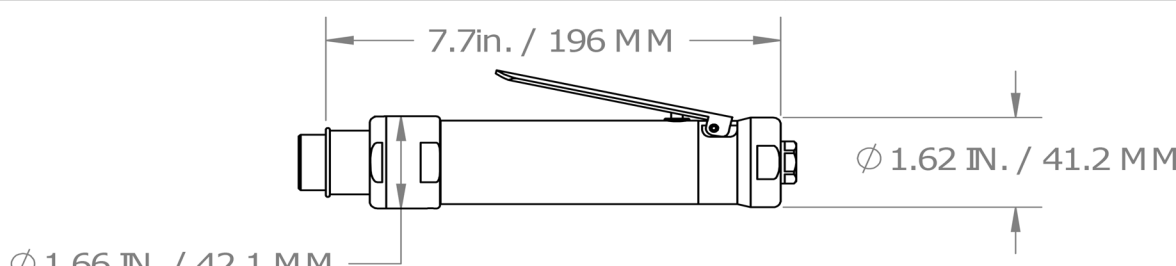
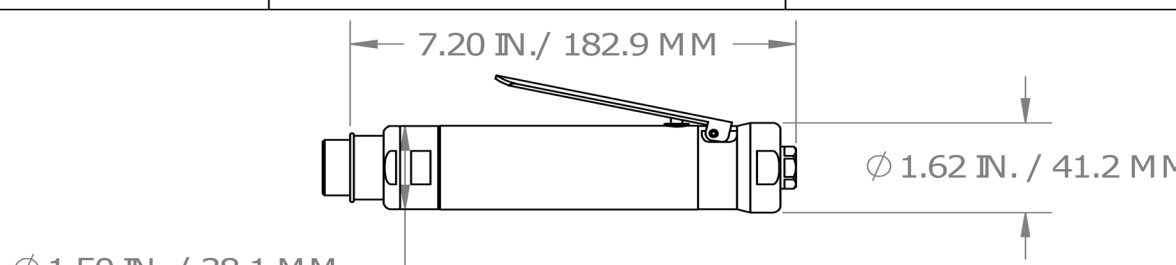
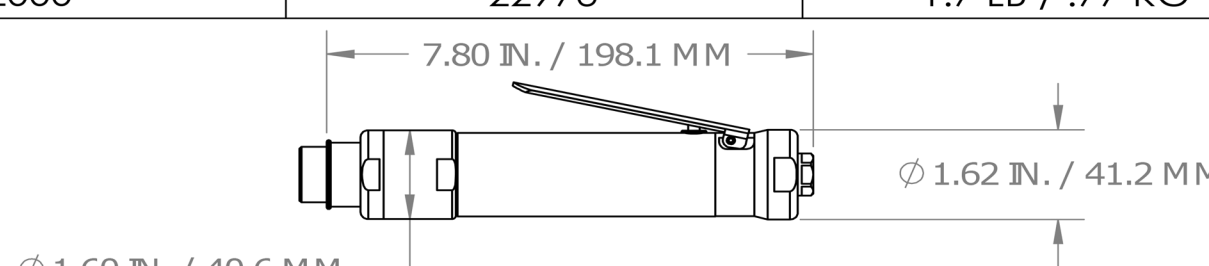
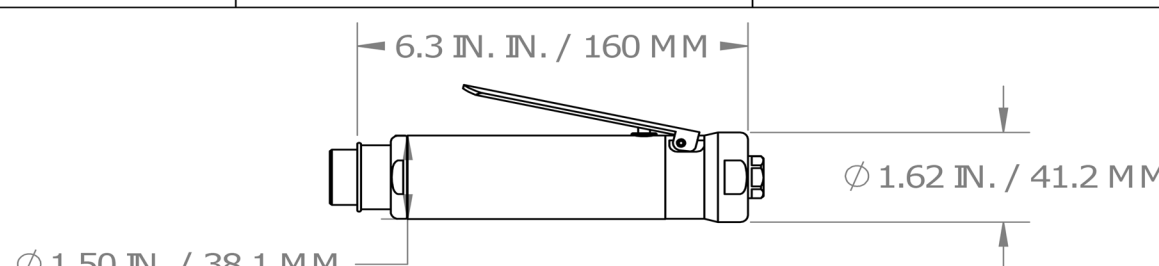
JIFFY MODULAR DRILL (JMD) .85 H.P. MOTOR - OFFSET HANDLE

RPM	ORDER NUMBER	WEIGHT
250	22977	1.94 LB / .88 KG
		
500	22978	1.64 LB / .74 KG
		
1000	22979	1.47 LB / .67 KG
		
2000	22980	1.47 LB / .67 KG
		
3000	22981	1.35 LB / .61 KG
6000	22982	1.35 LB / .61 KG
		

CONTACT SALES FOR REVERSE RUNNING VARIANTS

OIL-FREE

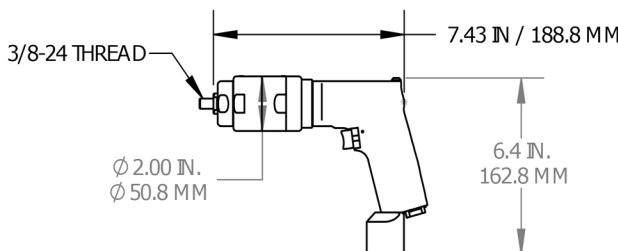
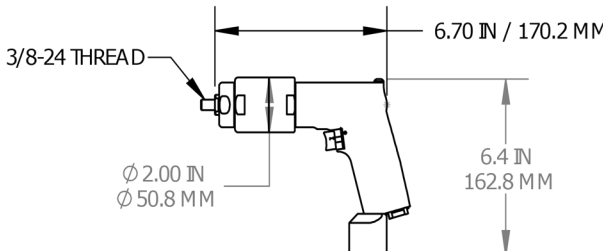
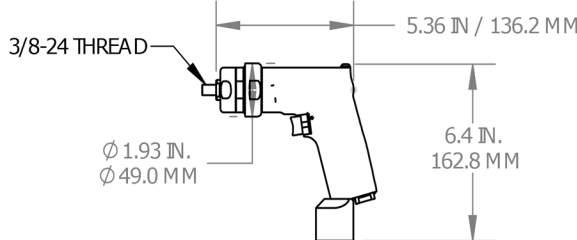
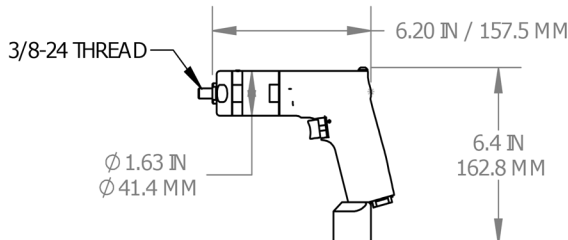
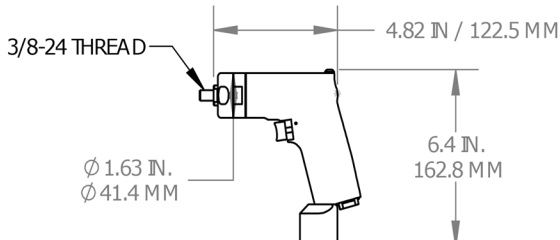
JIFFY MODULAR DRILL (JMD) .85 H.P. MOTOR - STRAIGHT HANDLE

RPM	ORDER NUMBER	WEIGHT
250	22970	2.1 LB / .95 KG
		
500	22971	1.6 LB / .73 KG
		
1000	22972	1.5 LB / .68 KG
		
2000	22973	1.7 LB / .77 KG
		
3000	22974	1.3 LB / .59 KG
6000	22975	1.3 LB / .59 KG
		

CONTACT SALES FOR REVERSE RUNNING VARIANTS

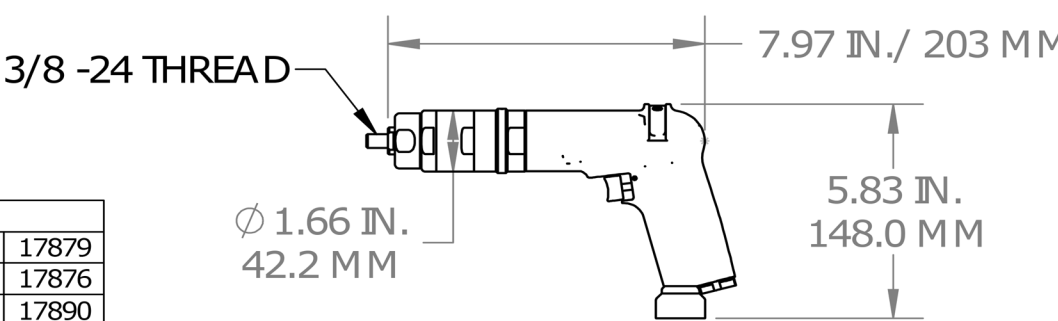
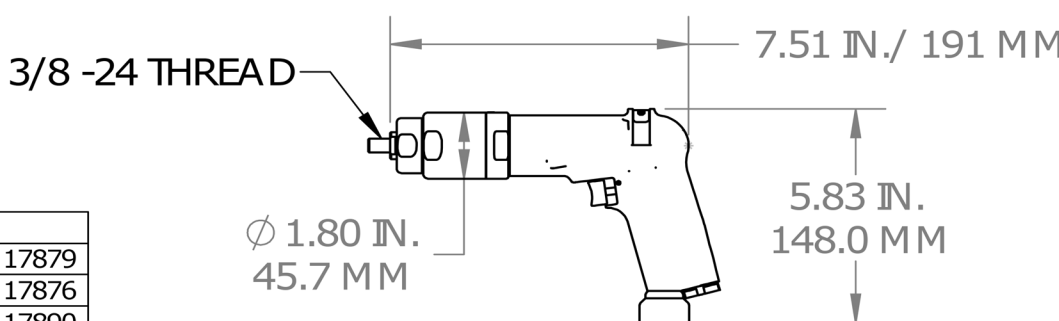
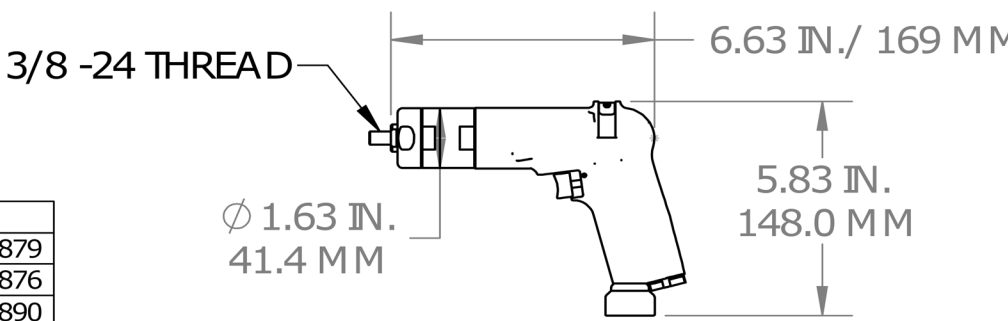
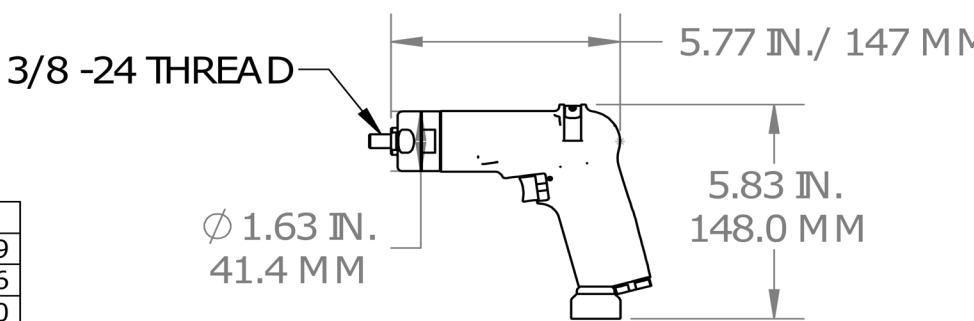
OIL-FREE

1.5 H.P. OFFSET MOTOR FOR CHUCKS

RPM	ORDER NUMBER		WEIGHT												
250	23061		3.68 LB / 1.67 KG												
<table><tr><th colspan="3">CHUCKS</th></tr><tr><td>1/4"</td><td>6.35mm</td><td>17879</td></tr><tr><td>3/8"</td><td>9.52mm</td><td>17876</td></tr><tr><td>1/2"</td><td>12.7mm</td><td>17890</td></tr></table> 20466 TORQUE REACTION HANDLE INCLUDED 				CHUCKS			1/4"	6.35mm	17879	3/8"	9.52mm	17876	1/2"	12.7mm	17890
CHUCKS															
1/4"	6.35mm	17879													
3/8"	9.52mm	17876													
1/2"	12.7mm	17890													
500	23062		3.15 LB / 1.43 KG												
<table><tr><th colspan="3">CHUCKS</th></tr><tr><td>1/4"</td><td>6.35mm</td><td>17879</td></tr><tr><td>3/8"</td><td>9.52mm</td><td>17876</td></tr><tr><td>1/2"</td><td>12.7mm</td><td>17890</td></tr></table> 20466 TORQUE REACTION HANDLE INCLUDED 				CHUCKS			1/4"	6.35mm	17879	3/8"	9.52mm	17876	1/2"	12.7mm	17890
CHUCKS															
1/4"	6.35mm	17879													
3/8"	9.52mm	17876													
1/2"	12.7mm	17890													
2000	23063		2.85 LB / 1.30 KG												
<table><tr><th colspan="3">CHUCKS</th></tr><tr><td>1/4"</td><td>6.35mm</td><td>17879</td></tr><tr><td>3/8"</td><td>9.52mm</td><td>17876</td></tr><tr><td>1/2"</td><td>12.7mm</td><td>17890</td></tr></table> 17908 TORQUE REACTION HANDLE AVAILABLE 				CHUCKS			1/4"	6.35mm	17879	3/8"	9.52mm	17876	1/2"	12.7mm	17890
CHUCKS															
1/4"	6.35mm	17879													
3/8"	9.52mm	17876													
1/2"	12.7mm	17890													
10,000	23066		2.95 LB / 1.30 KG												
<table><tr><th colspan="3">CHUCKS</th></tr><tr><td>1/4"</td><td>6.35mm</td><td>17879</td></tr><tr><td>3/8"</td><td>9.52mm</td><td>17876</td></tr><tr><td>1/2"</td><td>12.7mm</td><td>17890</td></tr></table> 17908 TORQUE REACTION HANDLE AVAILABLE 				CHUCKS			1/4"	6.35mm	17879	3/8"	9.52mm	17876	1/2"	12.7mm	17890
CHUCKS															
1/4"	6.35mm	17879													
3/8"	9.52mm	17876													
1/2"	12.7mm	17890													
3000	23064		2.26 LB / 1.03 KG												
6000	23065		2.26 LB / 1.03 KG												
20,000	23067		2.26 LB / 1.03 KG												
<table><tr><th colspan="3">CHUCKS</th></tr><tr><td>1/4"</td><td>6.35mm</td><td>17879</td></tr><tr><td>3/8"</td><td>9.52mm</td><td>17876</td></tr><tr><td>1/2"</td><td>12.7mm</td><td>17890</td></tr></table> 17908 TORQUE REACTION HANDLE AVAILABLE 				CHUCKS			1/4"	6.35mm	17879	3/8"	9.52mm	17876	1/2"	12.7mm	17890
CHUCKS															
1/4"	6.35mm	17879													
3/8"	9.52mm	17876													
1/2"	12.7mm	17890													

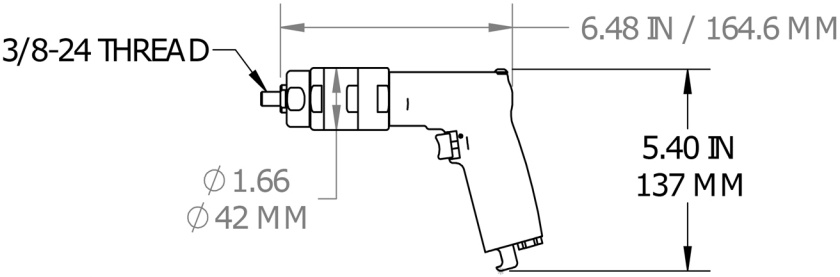
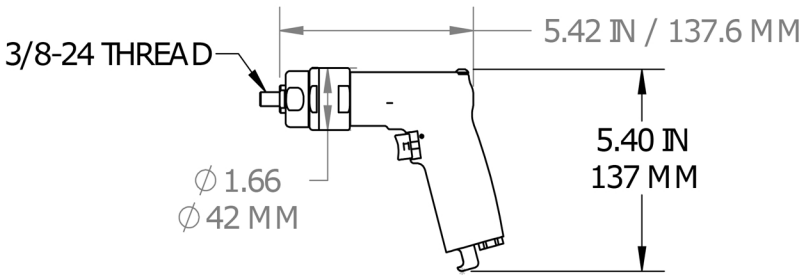
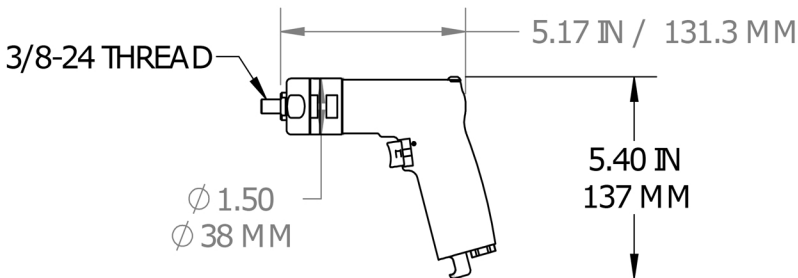
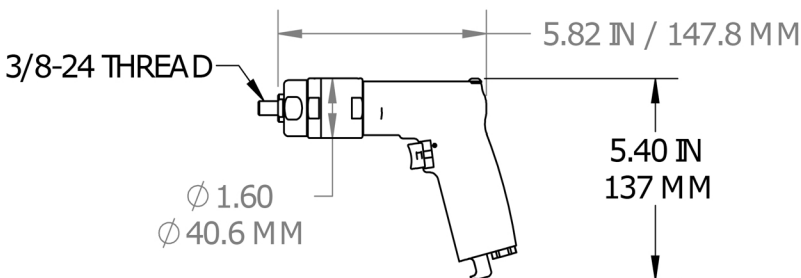
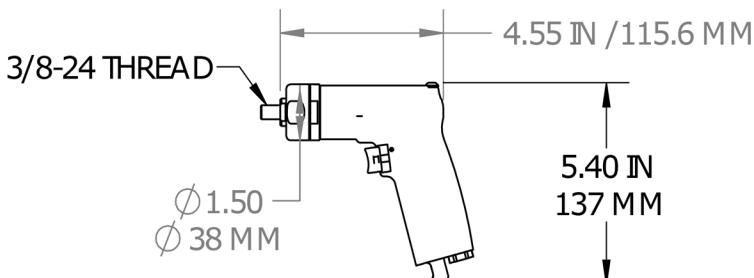
OIL-FREE

.9 H.P. REVERSIBLE MOTOR OFFSET HANDLE - FOR CHUCKS

RPM	ORDER NUMBER	WEIGHT												
250	23336	3.2 LB / 1.45 KG												
<table border="1"> <thead> <tr><th colspan="3">CHUCKS</th></tr> </thead> <tbody> <tr><td>1/4 "</td><td>6.35 MM</td><td>17879</td></tr> <tr><td>3/8 "</td><td>9.52 MM</td><td>17876</td></tr> <tr><td>1/2 "</td><td>12.7 MM</td><td>17890</td></tr> </tbody> </table> 			CHUCKS			1/4 "	6.35 MM	17879	3/8 "	9.52 MM	17876	1/2 "	12.7 MM	17890
CHUCKS														
1/4 "	6.35 MM	17879												
3/8 "	9.52 MM	17876												
1/2 "	12.7 MM	17890												
500	23337	2.9 LB / 1.32 KG												
<table border="1"> <thead> <tr><th colspan="3">CHUCKS</th></tr> </thead> <tbody> <tr><td>1/4 "</td><td>6.35 MM</td><td>17879</td></tr> <tr><td>3/8 "</td><td>9.52 MM</td><td>17876</td></tr> <tr><td>1/2 "</td><td>12.7 MM</td><td>17890</td></tr> </tbody> </table> 			CHUCKS			1/4 "	6.35 MM	17879	3/8 "	9.52 MM	17876	1/2 "	12.7 MM	17890
CHUCKS														
1/4 "	6.35 MM	17879												
3/8 "	9.52 MM	17876												
1/2 "	12.7 MM	17890												
1000	23338	2.7 LB / 1.22 KG												
<table border="1"> <thead> <tr><th colspan="3">CHUCKS</th></tr> </thead> <tbody> <tr><td>1/4 "</td><td>6.35 MM</td><td>17879</td></tr> <tr><td>3/8 "</td><td>9.52 MM</td><td>17876</td></tr> <tr><td>1/2 "</td><td>12.7 MM</td><td>17890</td></tr> </tbody> </table> 			CHUCKS			1/4 "	6.35 MM	17879	3/8 "	9.52 MM	17876	1/2 "	12.7 MM	17890
CHUCKS														
1/4 "	6.35 MM	17879												
3/8 "	9.52 MM	17876												
1/2 "	12.7 MM	17890												
3000	23340	2.4 LB / 1.1 KG												
5000	23341	2.4 LB / 1.1 KG												
<table border="1"> <thead> <tr><th colspan="3">CHUCKS</th></tr> </thead> <tbody> <tr><td>1/4 "</td><td>6.35 MM</td><td>17879</td></tr> <tr><td>3/8 "</td><td>9.52 MM</td><td>17876</td></tr> <tr><td>1/2 "</td><td>12.7 MM</td><td>17890</td></tr> </tbody> </table> 			CHUCKS			1/4 "	6.35 MM	17879	3/8 "	9.52 MM	17876	1/2 "	12.7 MM	17890
CHUCKS														
1/4 "	6.35 MM	17879												
3/8 "	9.52 MM	17876												
1/2 "	12.7 MM	17890												

OIL-FREE

.85 H.P. MOTOR OFFSET HANDLE - FOR CHUCKS

RPM	ORDER NUMBER	WEIGHT												
250	22992	1.94 LB / .88KG												
<table border="1" style="margin-right: 20px;"> <thead> <tr><th colspan="3">CHUCKS</th></tr> </thead> <tbody> <tr><td>1/4"</td><td>6.35mm</td><td>17879</td></tr> <tr><td>3/8"</td><td>9.52mm</td><td>17876</td></tr> <tr><td>1/2"</td><td>12.7mm</td><td>17890</td></tr> </tbody> </table> 			CHUCKS			1/4"	6.35mm	17879	3/8"	9.52mm	17876	1/2"	12.7mm	17890
CHUCKS														
1/4"	6.35mm	17879												
3/8"	9.52mm	17876												
1/2"	12.7mm	17890												
500	22994	1.75 LB / .79KG												
<table border="1" style="margin-right: 20px;"> <thead> <tr><th colspan="3">CHUCKS</th></tr> </thead> <tbody> <tr><td>1/4"</td><td>6.35mm</td><td>17879</td></tr> <tr><td>3/8"</td><td>9.52mm</td><td>17876</td></tr> <tr><td>1/2"</td><td>12.7mm</td><td>17890</td></tr> </tbody> </table> 			CHUCKS			1/4"	6.35mm	17879	3/8"	9.52mm	17876	1/2"	12.7mm	17890
CHUCKS														
1/4"	6.35mm	17879												
3/8"	9.52mm	17876												
1/2"	12.7mm	17890												
1000	22995	1.60 LB / .73KG												
<table border="1" style="margin-right: 20px;"> <thead> <tr><th colspan="3">CHUCKS</th></tr> </thead> <tbody> <tr><td>1/4"</td><td>6.35mm</td><td>17879</td></tr> <tr><td>3/8"</td><td>9.52mm</td><td>17876</td></tr> <tr><td>1/2"</td><td>12.7mm</td><td>17890</td></tr> </tbody> </table> 			CHUCKS			1/4"	6.35mm	17879	3/8"	9.52mm	17876	1/2"	12.7mm	17890
CHUCKS														
1/4"	6.35mm	17879												
3/8"	9.52mm	17876												
1/2"	12.7mm	17890												
2000	22996	1.60 LB / .73KG												
<table border="1" style="margin-right: 20px;"> <thead> <tr><th colspan="3">CHUCKS</th></tr> </thead> <tbody> <tr><td>1/4"</td><td>6.35mm</td><td>17879</td></tr> <tr><td>3/8"</td><td>9.52mm</td><td>17876</td></tr> <tr><td>1/2"</td><td>12.7mm</td><td>17890</td></tr> </tbody> </table> 			CHUCKS			1/4"	6.35mm	17879	3/8"	9.52mm	17876	1/2"	12.7mm	17890
CHUCKS														
1/4"	6.35mm	17879												
3/8"	9.52mm	17876												
1/2"	12.7mm	17890												
3000	22997	1.50 LB / .68KG												
6000	22998	1.50 LB / .68KG												
<table border="1" style="margin-right: 20px;"> <thead> <tr><th colspan="3">CHUCKS</th></tr> </thead> <tbody> <tr><td>1/4"</td><td>6.35mm</td><td>17879</td></tr> <tr><td>3/8"</td><td>9.52mm</td><td>17876</td></tr> <tr><td>1/2"</td><td>12.7mm</td><td>17890</td></tr> </tbody> </table> 			CHUCKS			1/4"	6.35mm	17879	3/8"	9.52mm	17876	1/2"	12.7mm	17890
CHUCKS														
1/4"	6.35mm	17879												
3/8"	9.52mm	17876												
1/2"	12.7mm	17890												

No oil required in air supply - Grease lubrication required for gear train

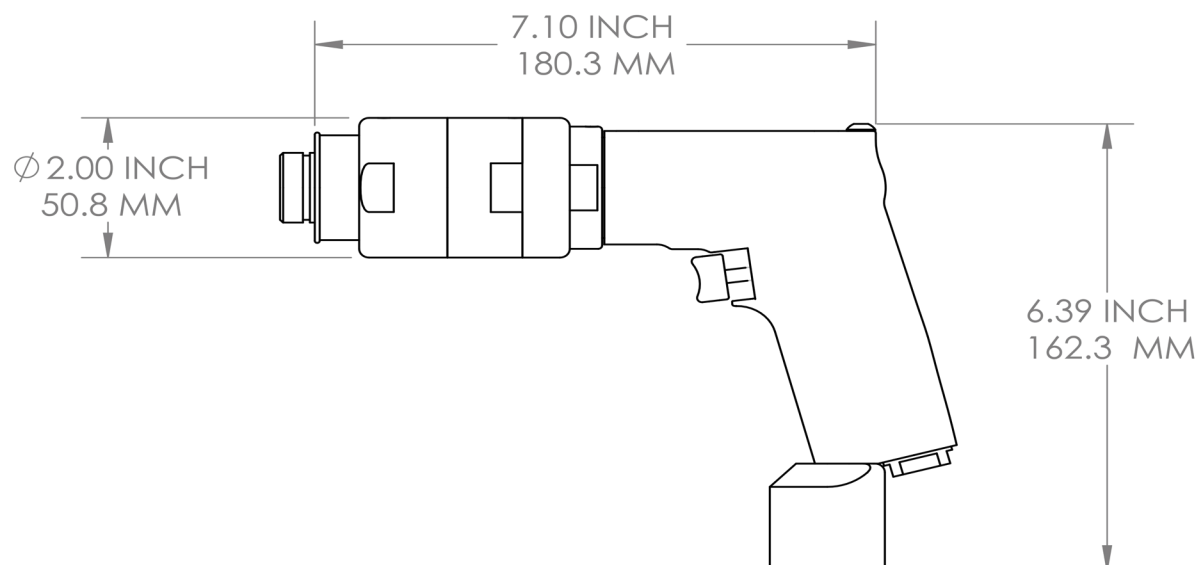


OIL-FREE

JIFFY MODULAR INSTALL (JMI) 1.5 H.P. MOTOR - OFFSET HANDLE

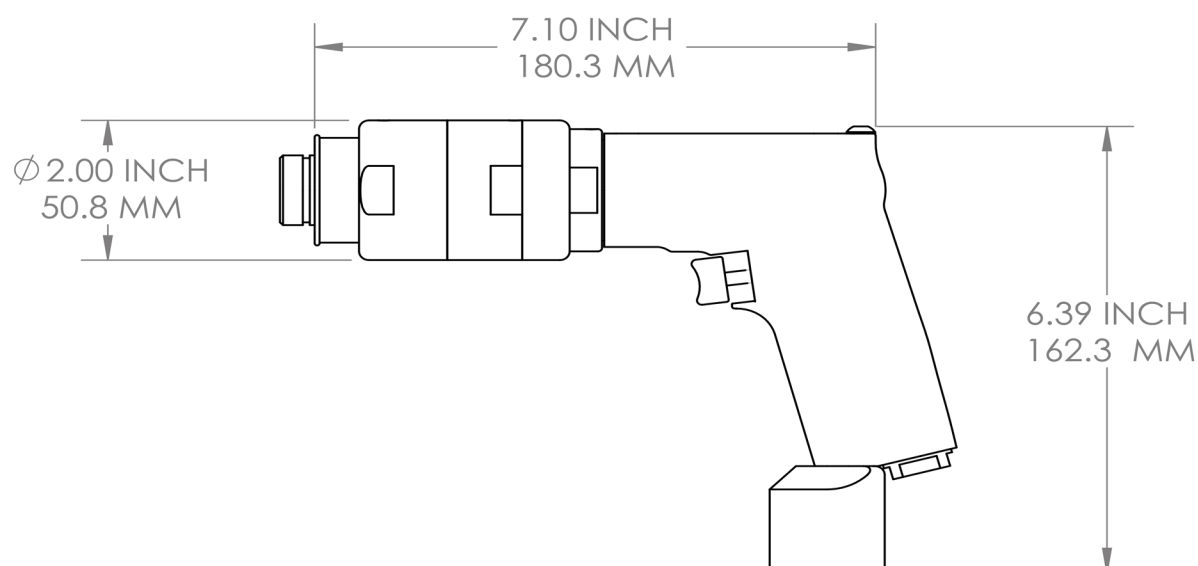
RPM	HEX DRIVE SIZE	ORDER NUMBER	WEIGHT
250	1 / 4"	23084	3.73 LB / 1.7 KG
250	3 / 8"	23088	3.73 LB / 1.7 KG

20466 TORQUE REACTION
HANDLE INCLUDED



500	1 / 4"	23092	3.73 LB / 1.7 KG
500	3 / 8"	23096	3.73 LB / 1.7 KG

20466 TORQUE REACTION
HANDLE INCLUDED



CONTACT SALES FOR REVERSE RUNNING VARIANTS

No oil required in air supply - Grease lubrication required for gear train



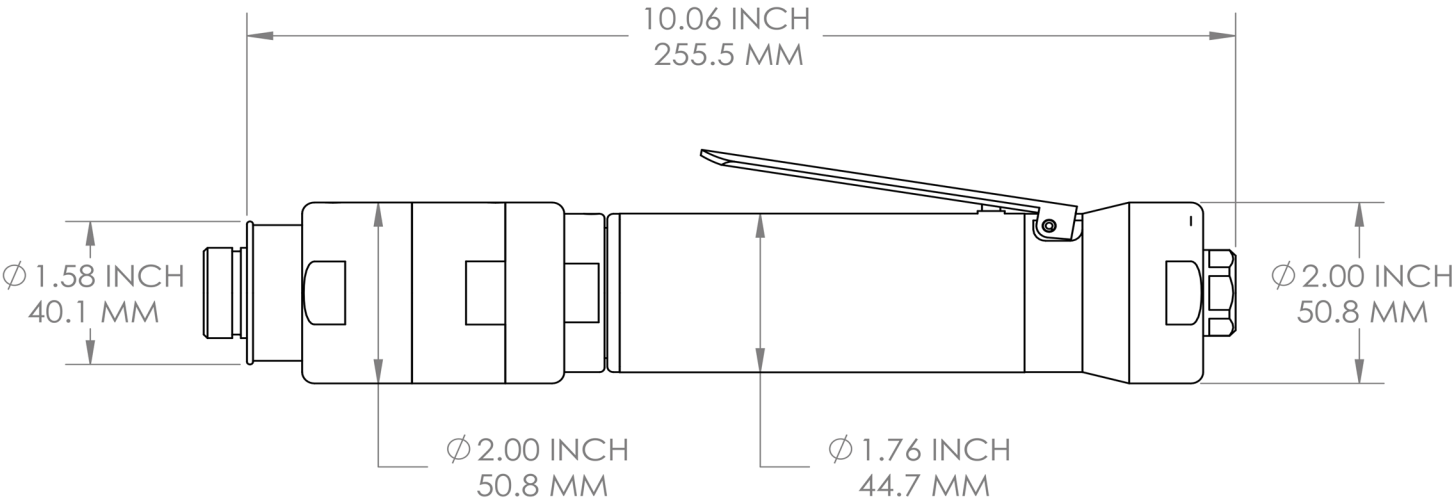
OIL-FREE

JIFFY MODULAR INSTALL (JMI) 1.5 H.P. MOTOR - STRAIGHT HANDLE

To conform to EC standards straight motors must be ordered with a safety lever.
 Add -1 to motor order number to designate safety lever.

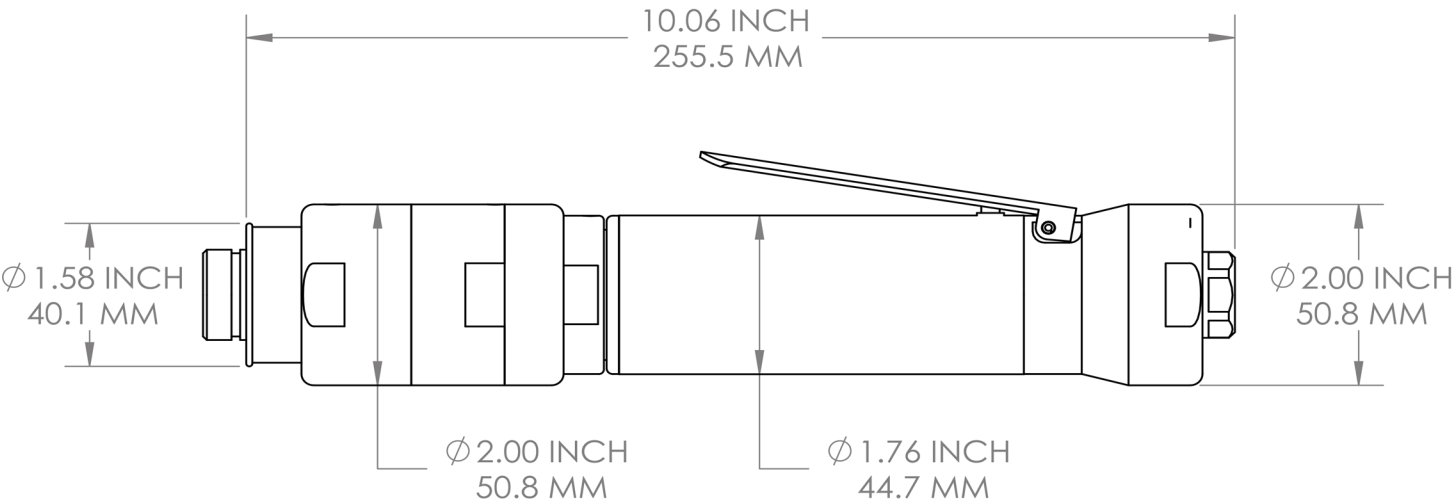
RPM	HEX DRIVE SIZE	ORDER NUMBER	WEIGHT
250	1 / 4 "	23082	3.73 LB / 1.7 KG
250	3 / 8 "	23086	3.73 LB / 1.7 KG

20466 TORQUE REACTION
HANDLE INCLUDED



500	1 / 4 "	23090	3.73 LB / 1.7 KG
500	3 / 8 "	23094	3.73 LB / 1.7 KG

20466 TORQUE REACTION
HANDLE INCLUDED



CONTACT SALES FOR REVERSE RUNNING VARIANTS

PHONE: 1 775 883 1072 FAX: 1 775 883 4857 WEB: www.jiffyairtool.com

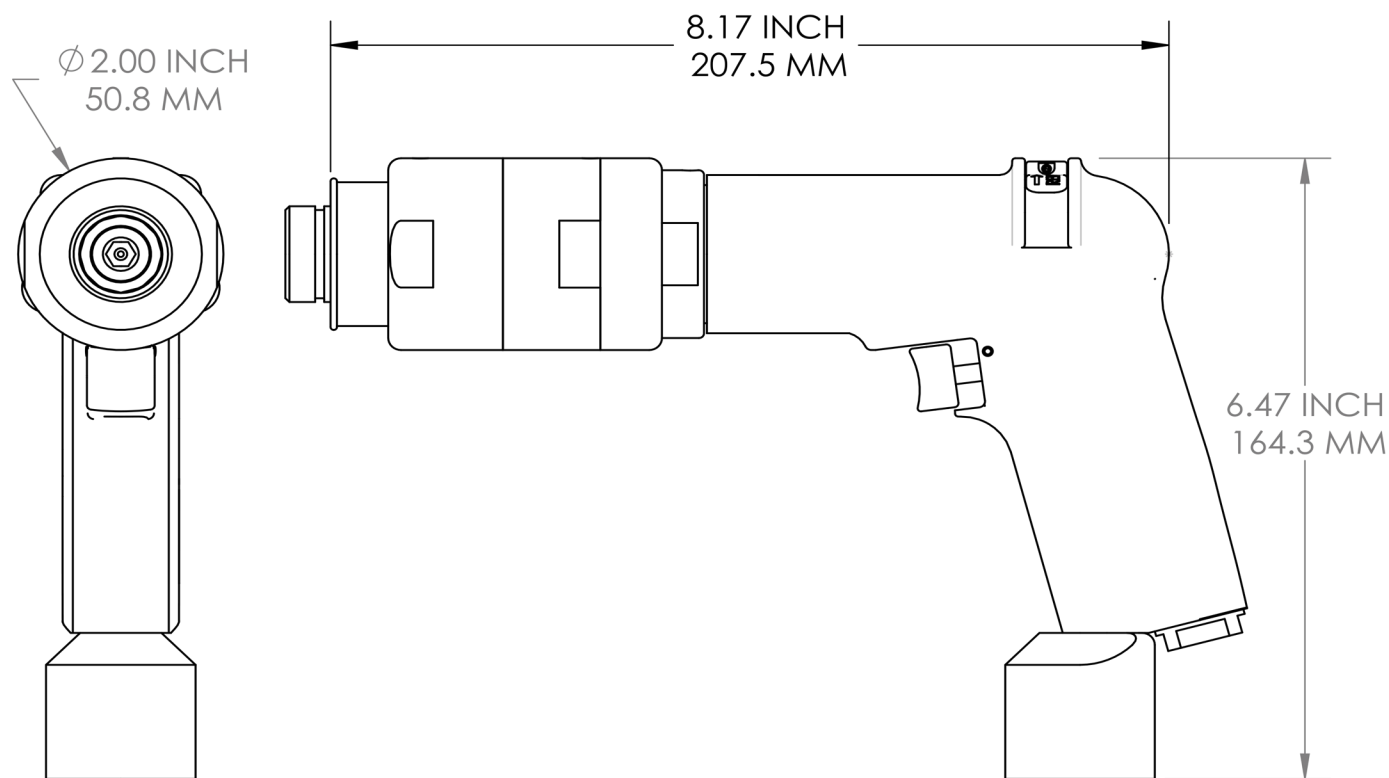
No oil required in air supply - Grease lubrication required for gear train



OIL-FREE

JIFFY MODULAR INSTALL (JMI) .9 H.P. REVERSIBLE MOTOR - OFFSET HANDLE

RPM	DRIVE	ORDER NUMBER	WEIGHT
250	1/4 HEX	23348	3.73 LB / 1.7 KG



No oil required in air supply - Grease lubrication required for gear train

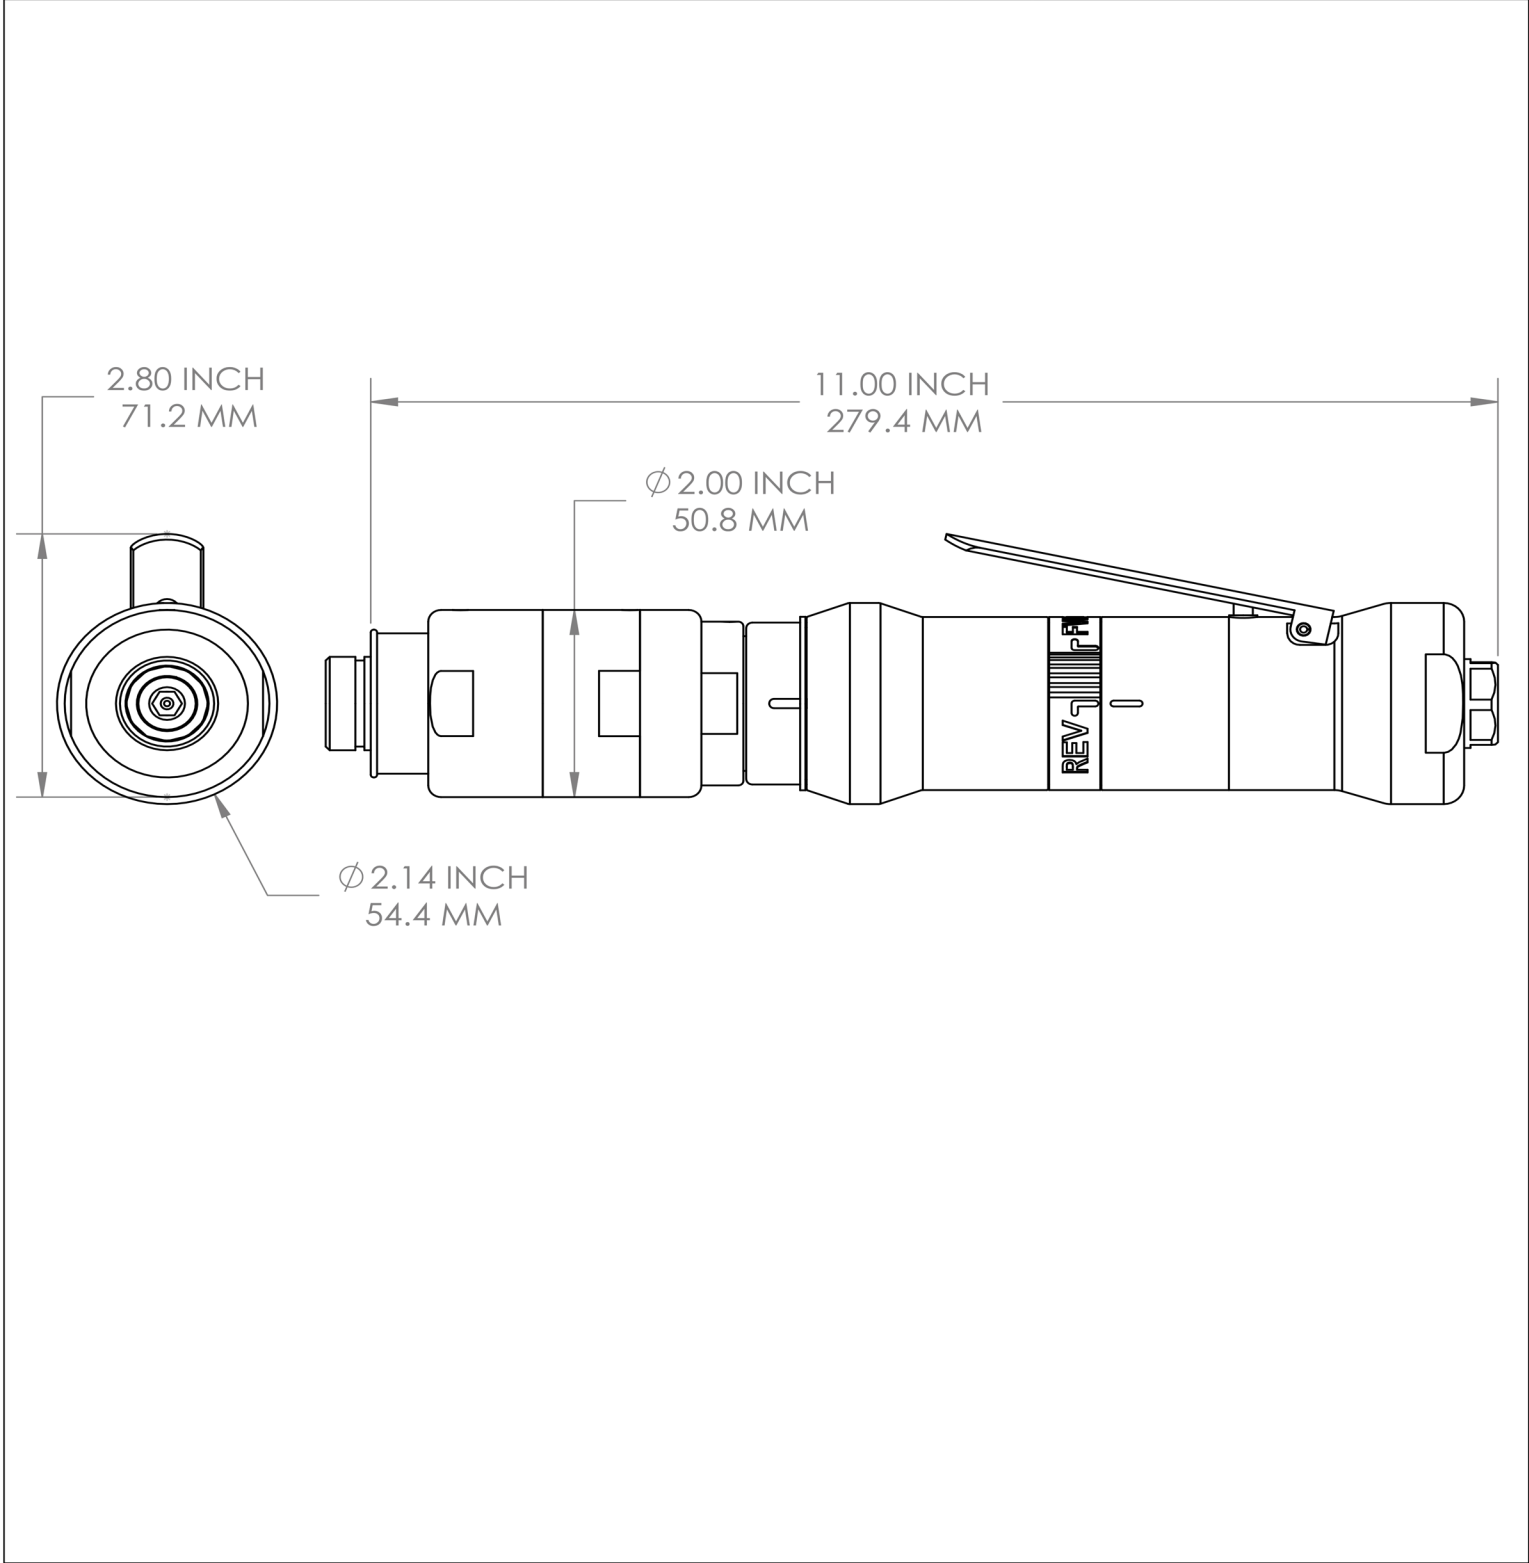


OIL-FREE

JIFFY MODULAR INSTALL (JMI) .9 H.P. REVERSIBLE MOTOR - STRAIGHT HANDLE

To conform to EC standards straight motors must be ordered with a safety lever.
 Add -1 to motor order number to designate safety lever.

RPM	DRIVE HEX	ORDER NUMBER	WEIGHT
250	1/4	23344	3.88 LB / 1.76 KG



No oil required in air supply - Grease lubrication required for gear train



OIL-FREE

JIFFY MODULAR INSTALL (JMI)
.85 H.P. MOTOR - OFFSET HANDLE

RPM	ORDER NUMBER	WEIGHT
250	23016	2.25 LB / 1.1 KG
500	23017	2.15 LB / .97 KG

CONTACT SALES FOR REVERSE RUNNING VARIANTS

No oil required in air supply - Grease lubrication required for gear train

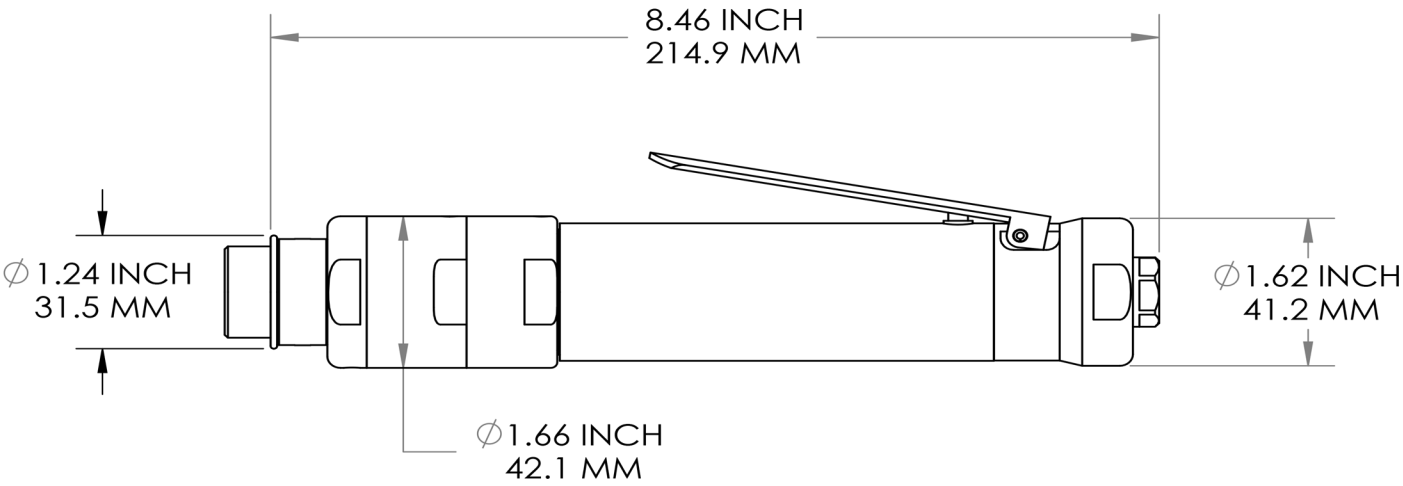


OIL-FREE

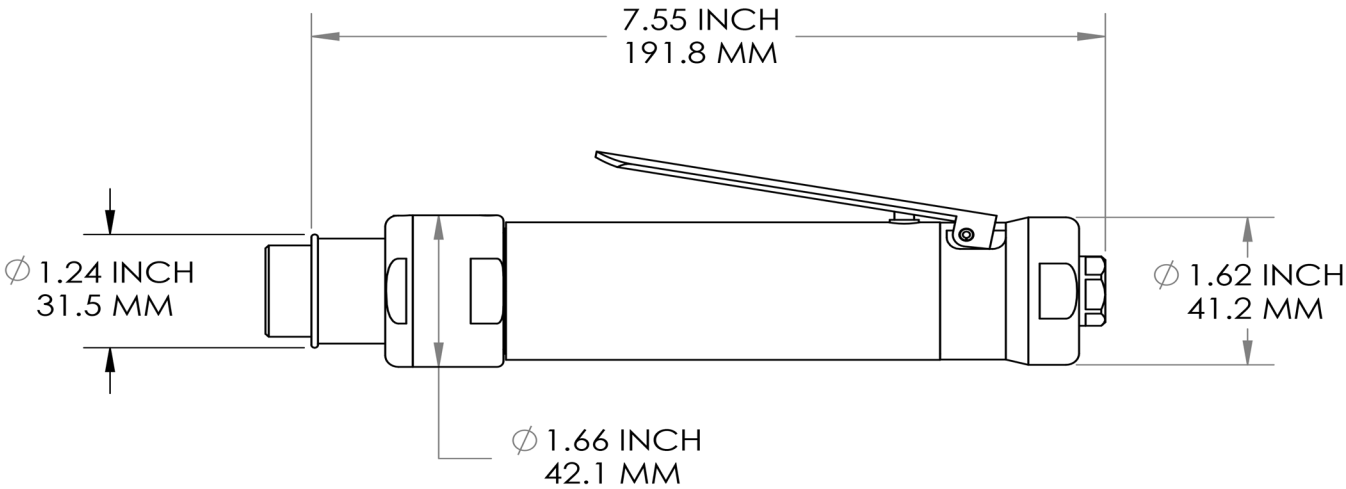
JIFFY MODULAR INSTALL (JMI)
.85 H.P. MOTOR - STRAIGHT HANDLE

CE To conform to EC standards straight motors must be ordered with a safety lever.
Add -1 to motor order number to designate safety lever.

RPM	ORDER NUMBER	WEIGHT
250	23014	1.88 LB / .85 KG

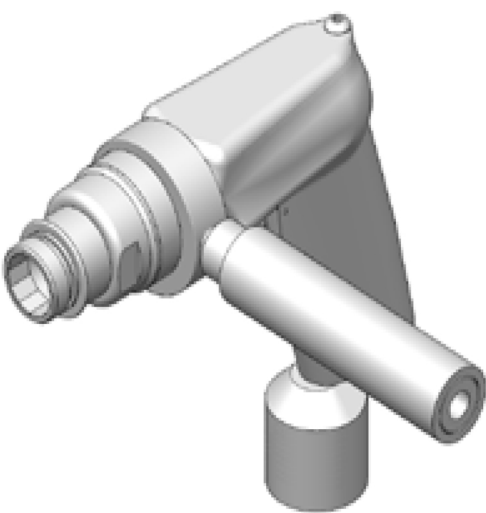
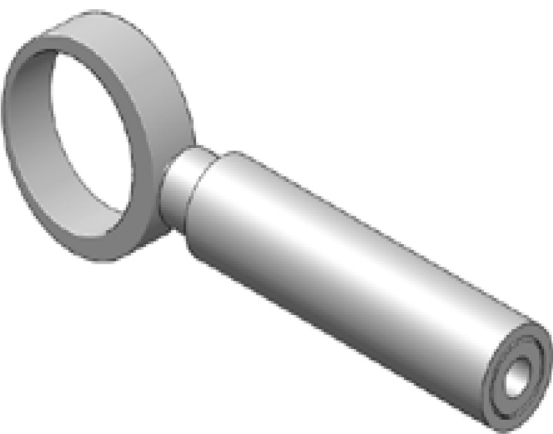


500	23015	1.73 LB / .78 KG
-----	-------	------------------



CONTACT SALES FOR REVERSE RUNNING VARIANTS

JIFFY TORQUE REACTION SAFETY HANDLES



17908 TORQUE REACTION HANDLE SMALL	
MOTOR HP	RPM
1.5	2000
	3000
	6000
	10,000
	20,000
.90 REVERSIBLE	1000
	3000
	5000
.85	250
	500
	1000
	2000
	3000
	6000

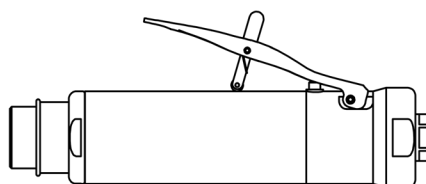
20466 TORQUE REACTION HANDLE LARGE	
MOTOR HP	RPM
1.5	250
	500
.90	250
	500

SAFETY LEVER OPTIONS

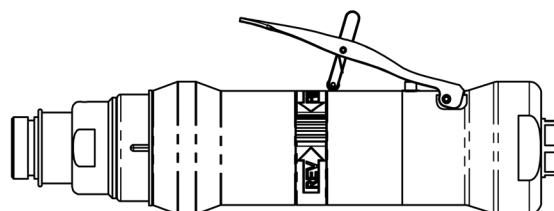
ADD -1 TO THE MOTOR NUMBER TO ADD THE SAFETY LEVER OPTION

EX: 23040-1 FOR 250RPM, 1.5 H.P. OIL-FREE STRAIGHT JMD MOTOR WITH SAFETY LEVER

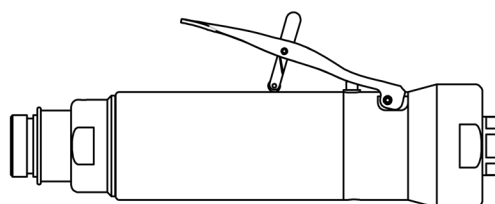
.85 HP MOTORS



.90 HP REVERSIBLE MOTORS



1.5 HP MOTORS



Industrialtooling